


ALUTRUSS Set Messestand Trilock 6082 7x4m 3m Höhe

Art. No.: 09000013

GTIN:

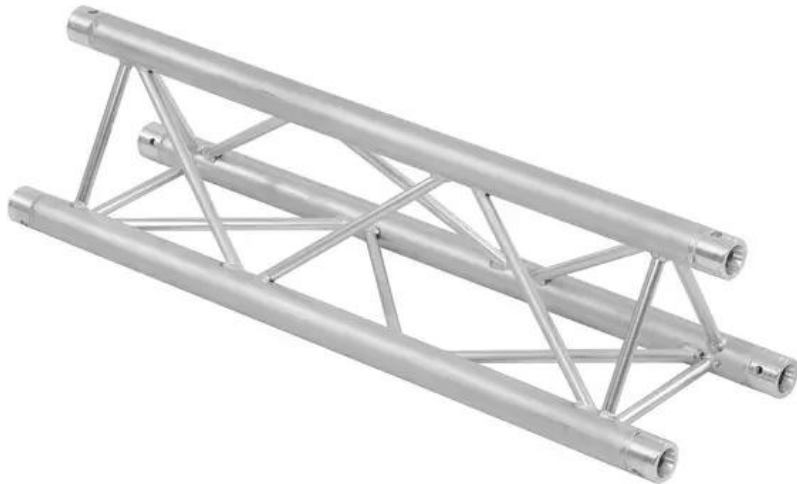

The article is no longer in our assortment.

Features:

Logistic

ALUTRUSS TRILOCK 6082-2500 3-way Cross Beam

3-point truss system

- Low weight
- Easy installation
- Trusspipe: 50 mm
- TÜV Süd certified
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school
- For further information about this product, please refer to the Data Sheet under "Downloads"

ALUTRUSS TRILOCK 6082-3000 3-way Cross Beam

3-point truss system

- Low weight
- Easy installation
- Trusspipe: 50 mm
- Suitable for Trilock 6082
- Any RAL color available on request
- TÜV Süd certified
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school
- For further information about this product, please refer to the Data Sheet under "Downloads"

ALUTRUSS TRILOCK 6082AL-31 3-way Corner /\ right

3-point truss system

- Low weight
- Easy installation
- Trusspipe: 50 mm
- Any RAL color available on request
- Made in Europe
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school

ALUTRUSS TRILOCK 6082AL-32 3-way Corner /\ left

3-point truss system

- Low weight
- Easy installation
- Trusspipe: 50 mm
- Made in Europe
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school

Technical specifications:

Weight:	129.00 kg
---------	-----------

ALUTRUSS TRILOCK 6082-2500 3-way Cross Beam

Setup:	Easy installation
Trusspipe:	50 mm x 2 mm
Welding technique:	TIG-welding
Welding material:	AlMg 5
Color:	Alu colored
Strut diameter x thickness:	16 x 2mm
Dimensions:	Length: 250 cm Width: 29 cm Height: 25.70 cm
Weight:	9.80 kg

ALUTRUSS TRILOCK 6082-3000 3-way Cross Beam

Setup:	Easy installation
Trusspipe:	50 mm x 2 mm
Welding technique:	TIG-welding
Welding material:	AlMg 5
Alloy:	EN-AW 6082 T6 (AlSi1Mg)
Material:	Aluminum
Color:	Alu colored; any RAL color available on request
Strut diameter x thickness:	16 x 2mm
Dimensions:	Length: 300 cm Width: 29 cm

	Height: 25.70 cm
Weight:	10.70 kg

ALUTRUSS TRILOCK 6082AL-31 3-way Corner $\wedge$ right

Setup:	Easy installation
Corner angle:	90°
Trusspipe:	50 mm x 2 mm
Welding technique:	TIG-welding
Welding material:	AlMg 5
Color:	Alu colored; any RAL color available on request
Strut diameter x thickness:	16 x 2mm
Dimensions:	Length: 50 cm Width: 50 cm Height: 50 cm
Weight:	6.60 kg

ALUTRUSS TRILOCK 6082AL-32 3-way Corner $\wedge$ left

Setup:	Easy installation
Corner angle:	90°
Trusspipe:	50 mm x 2 mm
Alloy:	EN-AW 6082 T6 (AlSi1Mg)
Color:	Alu colored
Strut diameter x thickness:	16 x 2mm
Dimensions:	Length: 50 cm Width: 50 cm Height: 50 cm
Weight:	6.20 kg

Scope of delivery:

4 x ALUTRUSS TRILOCK 6082-2500 3-way Cross Beam

1 x connection set

6 x ALUTRUSS TRILOCK 6082-3000 3-way Cross Beam

1 x truss
1 x connection set

2 x ALUTRUSS TRILOCK 6082AL-31 3-way Corner $\wedge$ right

2 x connection set

2 x ALUTRUSS TRILOCK 6082AL-32 3-way Corner $\wedge$ left

2 x connection set