


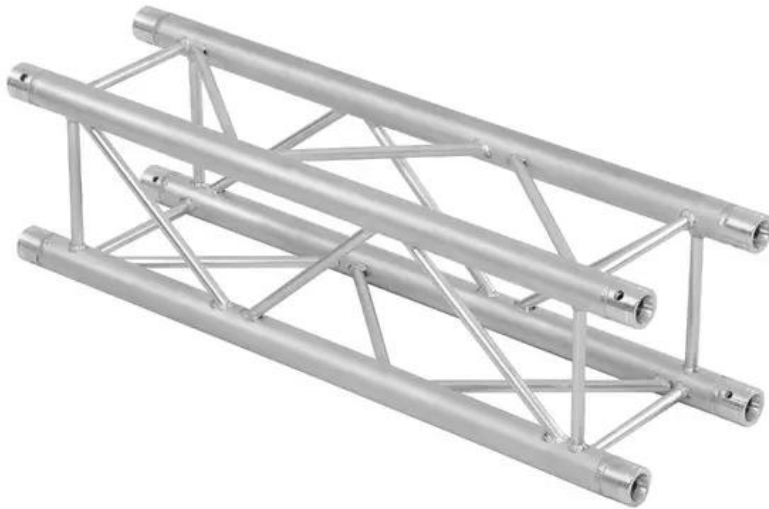

The article is no longer in our assortment.

Features:

Logistic

ALUTRUSS QUADLOCK 6082-2000 4-way Cross Beam

4-point truss system

- Strong EN-AW 6082 alloy for high loads
- High-quality aluminum-tubes with 50 mm in diameter
- Low weight
- Distance center - center: 240 mm
- Easy installation
- Trusspipe: 50 mm
- TÜV Süd certified
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school
- For further information about this product, please refer to the Data Sheet under "Downloads"

ALUTRUSS Truss Transport Board Combo incl. 3 Wheels

Transport cart with castors for QUADLOCK and TRILOCK truss elements

- The article is delivered dismantled

ALUTRUSS Truss Transport Ridge Combo

Stacking rail for QUADLOCK and TRILOCK truss elements

- Stacking ridge for quick and secure stacking of truss elements on matching transport carts
- Suitable for QUADLOCK and TRILOCK truss elements with 290 mm
- Made in Germany

SHZ Clamping Belt S400 Ratchet 5m/25mm black

Clamping belt

- LC400/800daN surroundings
- Complies with EN 12195-2
- Ratchet lock

Technical specifications:

Weight:	100.38 kg
---------	-----------

ALUTRUSS QUADLOCK 6082-2000 4-way Cross Beam

Setup:	Easy installation
Trusspipe:	50 mm x 2 mm
Welding technique:	TIG-welding
Welding material:	AlMg 5
Alloy:	AlMgSi1 T6 EN-AW 6082 T6 (AlSi1Mg)
Color:	Alu colored
Strut diameter x thickness:	16 x 2mm
Dimensions:	Length: 200 cm Width: 29 cm Height: 29 cm
Weight:	10.80 kg

ALUTRUSS Truss Transport Board Combo incl. 3 Wheels

Weight:	3.60 kg
---------	---------

ALUTRUSS Truss Transport Ridge Combo

Material:	Birch multiplex, 30 mm
Dimensions:	Length: 60 cm Width: 3 cm Depth: 5 cm
Weight:	0.50 kg

SHZ Clamping Belt S400 Ratchet 5m/25mm black

Standard:	EN 12195-2,
Lock:	Ratchet lock
Color:	Black

Dimensions:	Length: 500 cm
	Width: 2.50 cm
Weight:	0.30 kg

Scope of delivery:

1 x connection set