


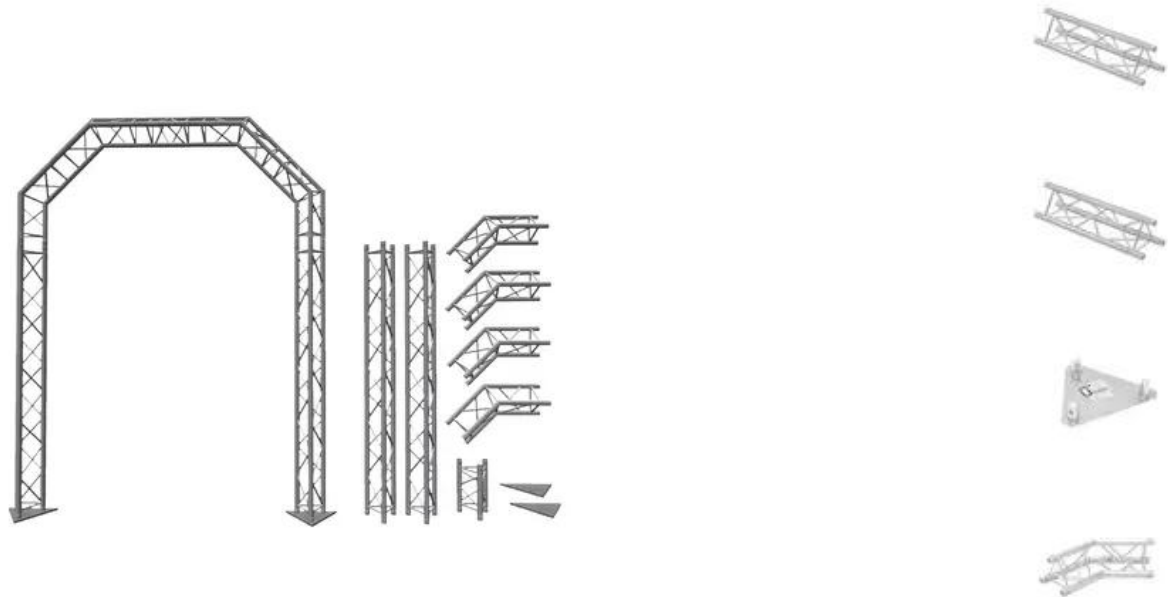

Features:

Logistic

ALUTRUSS TRILOCK 6082-500 3-way Cross Beam

3-point truss system

- Low weight
- Easy installation
- Trusspipe: 50 mm
- Suitable for Trilock 6082
- Any RAL color available on request
- Available in various colors and sizes
- TÜV Süd certified
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school
- For further information about this product, please refer to the Data Sheet under "Downloads"

ALUTRUSS TRILOCK 6082-2500 3-way Cross Beam

3-point truss system

- Low weight
- Easy installation
- Trusspipe: 50 mm
- TÜV Süd certified
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school
- For further information about this product, please refer to the Data Sheet under "Downloads"

ALUTRUSS TRILOCK Base Plate QTG-male

- Trusspipe: 50 mm
- Made in Europe

ALUTRUSS TRILOCK 6082AC-23 2-way Corner 135°

3-point truss system

- Low weight
- Easy installation
- Trusspipe: 50 mm
- Made in Europe
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school

Technical specifications:

Weight:	42.37 kg
---------	----------

ALUTRUSS TRILOCK 6082-500 3-way Cross Beam

Setup:	Easy installation
Trusspipe:	50 mm x 2 mm
Welding technique:	TIG-welding
Welding material:	AlMg 5
Material:	Aluminum
Color:	Alu colored; any RAL color available on request
Strut diameter x thickness:	16 x 2mm
Dimensions:	Length: 50 cm Width: 29 cm Height: 25.70 cm
Weight:	3.30 kg

ALUTRUSS TRILOCK 6082-2500 3-way Cross Beam

Setup:	Easy installation
Trusspipe:	50 mm x 2 mm
Welding technique:	TIG-welding
Welding material:	AlMg 5
Color:	Alu colored
Strut diameter x thickness:	16 x 2mm
Dimensions:	Length: 250 cm Width: 29 cm Height: 25.70 cm
Weight:	9.80 kg

ALUTRUSS TRILOCK Base Plate QTG-male

Trusspipe:	50 mm
Color:	Alu colored
Weight:	0.94 kg

ALUTRUSS TRILOCK 6082AC-23 2-way Corner 135°

Setup:	Easy installation
Corner angle:	135°
Trusspipe:	50 mm x 2 mm
Alloy:	EN-AW 6082 T6 (AlSi1Mg)
Color:	Alu colored
Strut diameter x thickness:	16 x 2mm
Dimensions:	Length: 50 cm Width: 50 cm Height: 25.70 cm
Weight:	4.4 kg

Scope of delivery:**1 x ALUTRUSS TRILOCK 6082-500 3-way Cross Beam**

1 x truss
1 x connection set

2 x ALUTRUSS TRILOCK 6082-2500 3-way Cross Beam

1 x connection set

4 x ALUTRUSS TRILOCK 6082AC-23 2-way Corner 135°

1 x connection set