


ALUTRUSS TRILOCK 6082 rectangle 3,5x3,5x3m

Art. No.: 09009931

GTIN:

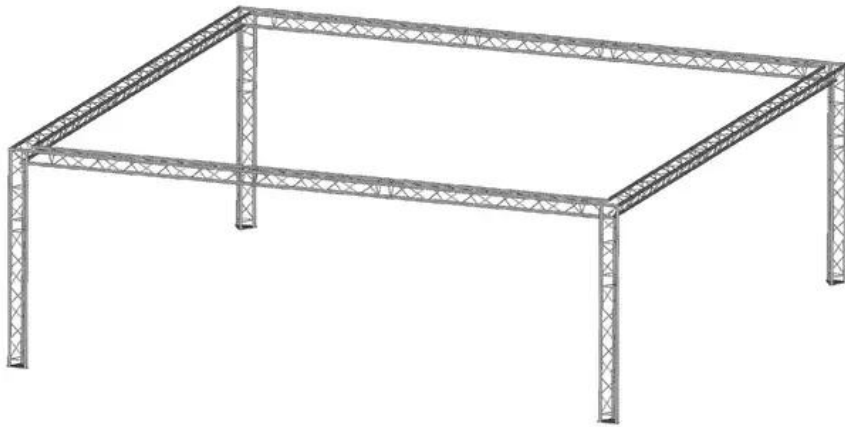

Features:

Logistic

ALUTRUSS TRILOCK 6082AL-33 3-way Corner V right

3-point truss system

- Low weight
- Easy installation
- Trusspipe: 50 mm
- Made in Europe
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school

ALUTRUSS TRILOCK 6082AL-34 3-way Corner V left

3-point truss system

- Low weight
- Easy installation
- Trusspipe: 50 mm
- Any RAL color available on request
- Made in Europe
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school

ALUTRUSS TRILOCK 6082-2500 3-way Cross Beam

3-point truss system

- Low weight
- Easy installation
- Trusspipe: 50 mm
- TÜV Süd certified
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school
- For further information about this product, please refer to the Data Sheet under "Downloads"

ALUTRUSS TRILOCK Base Plate QTG-male

- Trusspipe: 50 mm
- Made in Europe

Technical specifications:

Weight:	109.04 kg
---------	-----------

ALUTRUSS TRILOCK 6082AL-33 3-way Corner V right

Setup:	Easy installation
Corner angle:	90°
Trusspipe:	50 mm x 2 mm
Alloy:	EN-AW 6082 T6 (AlSi1Mg)
Color:	Alu colored
Strut diameter x thickness:	16 x 2mm
Dimensions:	Length: 50 cm Width: 50 cm Height: 50 cm
Weight:	6.50 kg

ALUTRUSS TRILOCK 6082AL-34 3-way Corner V left

Setup:	Easy installation
Corner angle:	90°
Trusspipe:	50 mm x 2 mm
Welding technique:	TIG-welding
Welding material:	AlMg 5
Alloy:	EN-AW 6082 T6 (AlSi1Mg)
Color:	Alu colored; any RAL color available on request
Strut diameter x thickness:	16 x 2mm
Dimensions:	Length: 50 cm Width: 50 cm Height: 50 cm
Weight:	6.95 kg

ALUTRUSS TRILOCK 6082-2500 3-way Cross Beam

Setup:	Easy installation
Trusspipe:	50 mm x 2 mm
Welding technique:	TIG-welding
Welding material:	AlMg 5
Color:	Alu colored
Strut diameter x thickness:	16 x 2mm
Dimensions:	Length: 250 cm Width: 29 cm Height: 25.70 cm
Weight:	9.80 kg

ALUTRUSS TRILOCK Base Plate QTG-male

Trusspipe:	50 mm
Color:	Alu colored
Weight:	0.94 kg

Scope of delivery:

2 x ALUTRUSS TRILOCK 6082AL-33 3-way Corner V right

2 x connection set

2 x ALUTRUSS TRILOCK 6082AL-34 3-way Corner V left

1 x device

2 x connection set

8 x ALUTRUSS TRILOCK 6082-2500 3-way Cross Beam

1 x connection set