


ALUTRUSS QUADLOCK 6082 Karree 3,5x3,5x3m

Art. No.: 09009944

GTIN:

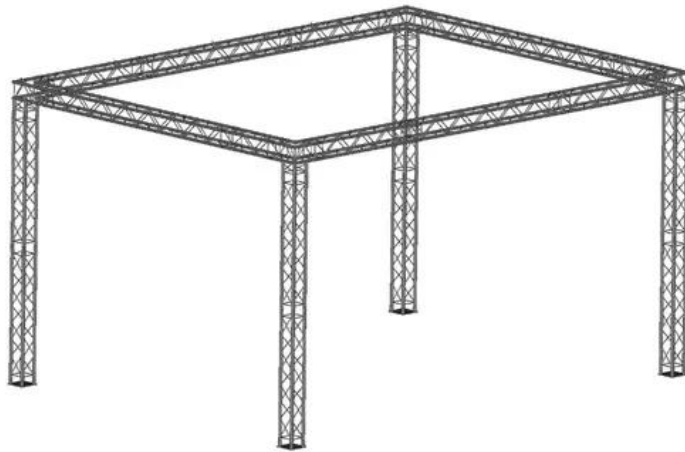

Features:

Logistic

ALUTRUSS QUADLOCK 6082L-30 3-way Corner 90°

4-point truss system

- Strong EN-AW 6082 alloy for high loads
- High-quality aluminum-tubes with 50 mm in diameter
- Low weight
- Distance center - center: 240 mm
- Easy installation
- Trusspipe: 50 mm
- Made in Europe
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school

ALUTRUSS QUADLOCK End Plate QQGP-Male

- Trusspipe: 50 mm
- Made in Europe
- **cone**
- M8 thread

ALUTRUSS QUADLOCK 6082-2500 4-way Cross Beam

4-point truss system

- Strong EN-AW 6082 alloy for high loads
- High-quality aluminum-tubes with 50 mm in diameter
- Low weight
- Distance center - center: 240 mm
- Easy installation
- Trusspipe: 50 mm
- TÜV Süd certified
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school
- For further information about this product, please refer to the Data Sheet under "Downloads"

Technical specifications:

Weight:	132.40 kg
---------	-----------

ALUTRUSS QUADLOCK 6082L-30 3-way Corner 90°

Setup:	Easy installation
Corner angle:	90°
Trusspipe:	50 mm x 2 mm
Alloy:	EN-AW 6082 T6 (AlSi1Mg)
Color:	Alu colored
Strut diameter x thickness:	16 x 2mm
Dimensions:	Length: 50 cm
	Width: 50 cm
	Height: 50 cm
Weight:	7.95 kg

ALUTRUSS QUADLOCK End Plate QQGP-Male

Trusspipe:	50 mm
Color:	Alu colored
Weight:	1.45 kg
Thread:	M8 thread

ALUTRUSS QUADLOCK 6082-2500 4-way Cross Beam

Setup:	Easy installation
Trusspipe:	50 mm x 2 mm
Welding technique:	TIG-welding
Welding material:	AlMg 5
Alloy:	AlMgSi1 T6 EN-AW 6082 T6 (AlSi1Mg)
Color:	Alu colored
Strut diameter x thickness:	16 x 2mm

Dimensions:	Length: 250 cm
	Width: 29 cm
	Height: 29 cm
Weight:	11.85 kg

Scope of delivery:

4 x ALUTRUSS QUADLOCK 6082L-30 3-way Corner 90°
2 x connection set

8 x ALUTRUSS QUADLOCK 6082-2500 4-way Cross Beam
1 x connection set