


PSSO KX-P215A 2-way Speaker, active, DSP

Active speaker with 15" woofer, 1" driver, 700 W RMS,

Art. No.: 11041181

GTIN: 4026397743937

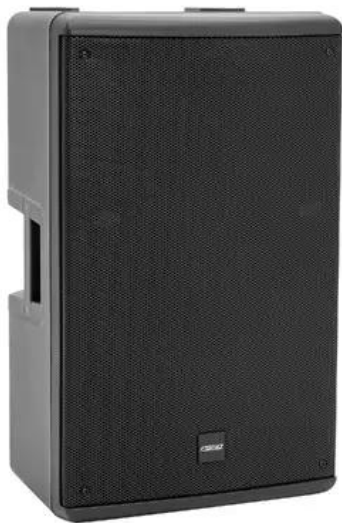

List price: 653.31 €

incl. 19% VAT.

Features:

- Active PA speaker system for touring applications and permanent installations
- Versatile setup options with the KX subwoofer and specially tuned presets
- High-quality and sturdy PP cabinet with internal bracing, qualified for suspension
- DSP-controlled biamp amplifier (class D)
- 2-way bass-reflex system
- Line input (XLR/6.3 mm jack) with separate level control
- Mic/line input (XLR/6.3 mm jack) with separate level control
- Mixed output for linking further active speaker systems
- Digital signal processor FIR Filter
- DSP presets: LIVE; MONITOR; MUSIC; SPEECH; SUB; FLAT
- The device is cooled by passive convection cooling
- With rigging points
- Black metal grille with acoustic foam
- 3 Rugged carrying handles

Logistic

EAN / GTIN: 4026397743937

Weight: 23,05 kg

Length: 0.45 m

Width: 0.47 m

Height: 0.74 m

Technical specifications:

Power supply:	230 V AC, 50 Hz
Power consumption:	1200 W
Protection class:	Protection class I
Power connection:	Mains input via P-Con (blue), mounting version power supply cord with safety plug (provided)
Power output:	1 x P-Con (grey), mounting version

Fuse:	5 x 20 mm, T 10 A fuse serviceable
Power:	700W RMS Peak: 1400W
Frequency range:	45 - 20000 Hz
Max. SPL:	136 dB
DSP:	Digital signal processor FIR Filter
DSP presets:	LIVE; MONITOR; MUSIC; SPEECH; SUB; FLAT
Dispersion angle:	90° x 60°
Cooling:	Passive convection cooling
Attachment system:	Flange: Ø 35mm
Flying points:	3 x M10 thread
Circuitry:	Class D Biamp
Control elements:	Power switch, groundlift selector, Input sensitivity switch, DSP preset switch, level control per channel
Controls:	Overheat; DC voltage; short-circuit; limiter
Status LED:	Power, signal, clip
Connections:	Input: mic/line via 1 x 3-pin XLR/6.35mm jack (F) combination socket (mounting version) Input: line via 1 x 3-pin XLR/6.35mm jack (F) combination socket (mounting version) Output: line via 1 x 3-pin XLR (M) mounting version
Speaker:	1 x woofer 15" with ferrit magnet Basket material: steel Conematerial: cardboard/paper Voice coil lows 3" 1 x compression tweeter highs 1" with ferrit magnet Voice coil compression tweeter highs 1,5"
Type of speaker:	Compact cabinet speaker
Type of construction:	Vented
Carrying handle:	3 pc/pcs
Material:	PP polypropylene, powder-coated
Color:	Black, matte
Dimensions:	Width: 42.3 cm Depth: 39 cm Height: 68.7 cm
Weight:	20.45 kg
Cable construction:	3 x 0.75 mm² H05VV-F
Cable length:	2.5 m detachable

Scope of delivery:

1 x top
1 x power cord
1 x user manual