


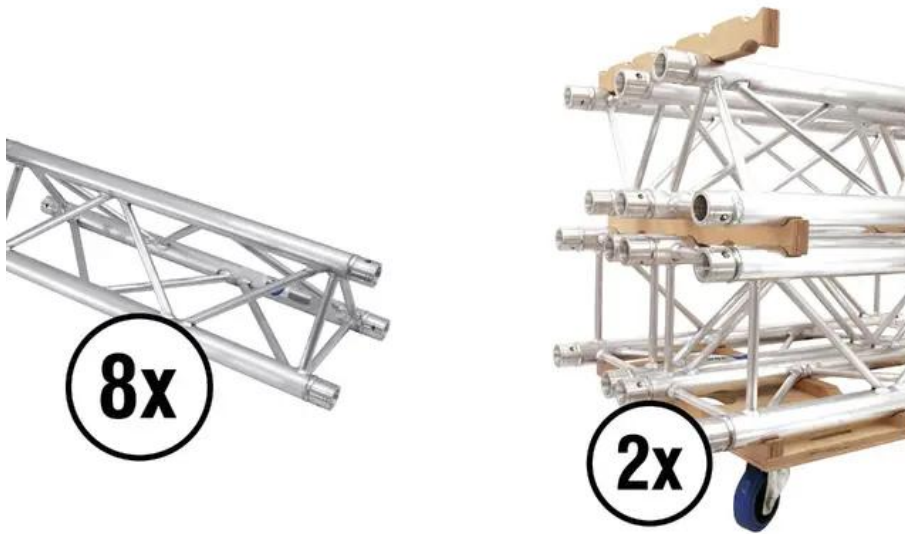

Features:

ALUTRUSS TRILOCK 6082-2000 3-way Cross Beam

3-point truss system

- Low weight
- Easy installation
- Trusspipe: 50 mm
- TÜV Süd certified
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school
- For further information about this product, please refer to the Data Sheet under "Downloads"

ALUTRUSS Truss Transport Board Combo for 3 Wheels

Transport cart for QUADLOCK and TRILOCK truss elements

- Practical transport cart made of multiplex wood
- Suitable for QUADLOCK and TRILOCK truss elements with 290 mm
- Quick and secure stacking with optional stacking ridges
- Cut-outs for safety bands for safe transport of the truss elements
- Grip hole
- 12 borings for mounting castors (optional)
- The combination of 2 transport carts and 10 stacking ridges allows transport of 12 truss elements (recommended maximum load)
- Made in Germany

Logistic

EAN / GTIN: 4026397583236

Weight: 90,00 kg

Length: 0.60 m

Width: 0.80 m

Height: 2.10 m

Bulky product

ROADINGER Swivel Castor 100mm BLUE WHEEL light blue

100 mm swivel castor

- Double ball race
- Housing made of steel, zinc-plated
- Roller race hub bearing
- Replaceable bolt-on wheel
- Carrying capacity: 450 kg per set (4 castors)
- Made in Germany
- For further information about this product, please refer to the Data Sheet under "Downloads"

ROADINGER Swivel Castor 100mm BLUE WHEEL with brake

100 mm swivel castor

- Double-action brake (wheel and swivel)
- Double ball race
- Housing made of steel, zinc-plated
- Roller race hub bearing
- Replaceable bolt-on wheel
- Carrying capacity: 450 kg per set (4 castors)
- Made in Germany
- For further information about this product, please refer to the Data Sheet under "Downloads"

ROADINGER Bolt Set for Wheels

Complete set (4 x screw, 4 x nut, 4 x washer)

- Screw: hexagon screw M8 x30 DIN933 galvanized
- Nut: hexagon screw KI.8 M8 DIN 934 galvanized
- Washer: size 8.4 DIN125 electrogalvanized

ALUTRUSS Truss Transport Ridge Combo

Stacking rail for QUADLOCK and TRILOCK truss elements

- Stacking ridge for quick and secure stacking of truss elements on matching transport carts
- Suitable for QUADLOCK and TRILOCK truss elements with 290 mm
- Made in Germany

SHZ Clamping Belt S400 Ratchet 5m/25mm black

Clamping belt

- LC400/800daN surroundings
- Complies with EN 12195-2
- Ratchet lock
- Closes with a

Technical specifications:

Weight: 86.00 kg

ALUTRUSS TRILOCK 6082-2000 3-way Cross Beam

Setup: Easy installation

Trusspipe: 50 mm x 2 mm

Welding technique: TIG-welding

Welding material: AlMg 5

Color:	Alu colored
Strut diameter x thickness:	16 x 2mm
Dimensions:	Length: 200 cm Width: 29 cm Height: 25.70 cm
Weight:	8.20 kg

ALUTRUSS Truss Transport Board Combo for 3 Wheels

Maximum load:	6 truss systems vertical (height approx. 2.10 m)
Dimensions:	Length: 60 cm Width: 30 cm Height: 4.10 cm
Weight:	2.19 kg

ROADINGER Swivel Castor 100mm BLUE WHEEL light blue

Color:	Light blue
Dimensions:	Height: 12.8 cm Diameter: Ø 10 cm
Weight:	0.66 kg

ROADINGER Swivel Castor 100mm BLUE WHEEL with brake

Color:	Light blue
Dimensions:	Height: 12.8 cm Diameter: Ø 10 cm
Weight:	0.93 kg

ROADINGER Bolt Set for Wheels

Weight:	0.09 kg
---------	---------

ALUTRUSS Truss Transport Ridge Combo

Material:	Birch multiplex, 30 mm
Dimensions:	Length: 60 cm Width: 3 cm Depth: 5 cm
Weight:	0.50 kg

SHZ Clamping Belt S400 Ratchet 5m/25mm black

Standard:	EN 12195-2,
Lock:	Ratchet lock
Color:	Black

Dimensions:	Length: 500 cm
	Width: 2.50 cm
Weight:	0.30 kg

Scope of delivery:

1 x connection set