


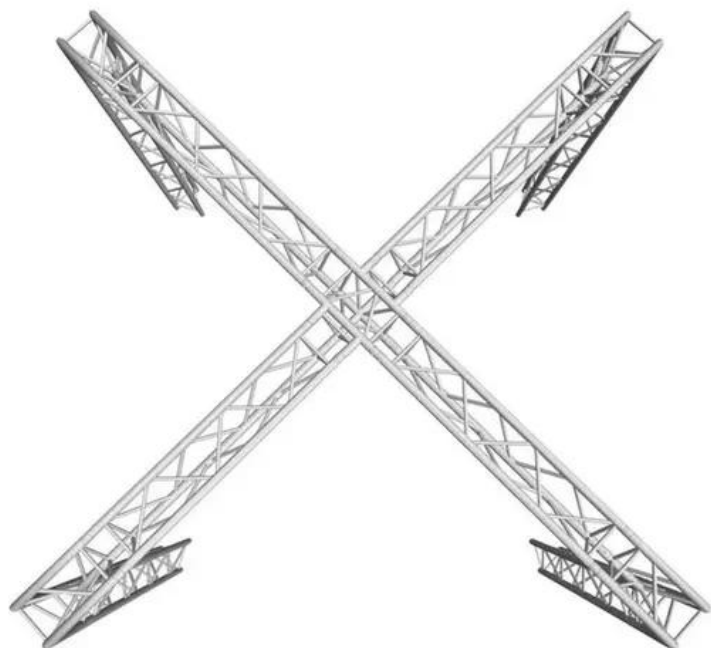

The article is no longer in our assortment.

Features:

Logistic

ALUTRUSS TRILOCK 6082-2500 3-way Cross Beam

3-point truss system

- Low weight
- Easy installation
- Trusspipe: 50 mm
- TÜV Süd certified
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school
- For further information about this product, please refer to the Data Sheet under "Downloads"

ALUTRUSS TRILOCK 6082AC-41 4-way Cross

3-point truss system

- Low weight
- Easy installation
- Trusspipe: 50 mm
- Made in Europe
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school

ALUTRUSS TRILOCK 6082AC-25 2-way Corner 90° V

3-point truss system

- Low weight
- Easy installation
- Trusspipe: 50 mm
- Made in Europe
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school

ALUTRUSS TRILOCK Base Plate QTG-male

- Trusspipe: 50 mm
- Made in Europe

Technical specifications:

Weight:	106.54 kg
---------	-----------

ALUTRUSS TRILOCK 6082-2500 3-way Cross Beam

Setup:	Easy installation
--------	-------------------

Trusspipe:	50 mm x 2 mm
------------	--------------

Welding technique:	TIG-welding
--------------------	-------------

Welding material:	AlMg 5
-------------------	--------

Color:	Alu colored
--------	-------------

Strut diameter x thickness:	16 x 2mm
-----------------------------	----------

Dimensions:	Length: 250 cm Width: 29 cm Height: 25.70 cm
-------------	--

Weight:	9.80 kg
---------	---------

ALUTRUSS TRILOCK 6082AC-41 4-way Cross

Setup:	Easy installation
--------	-------------------

Corner angle:	90°
---------------	-----

Trusspipe:	50 mm x 2 mm
------------	--------------

Alloy:	EN-AW 6082 T6 (AlSi1Mg)
--------	-------------------------

Color:	Alu colored
--------	-------------

Strut diameter x thickness:	16 x 2mm
-----------------------------	----------

Dimensions:	Length: 71 cm Width: 71 cm Height: 25.70 cm
-------------	---

Weight:	8 kg
---------	------

ALUTRUSS TRILOCK 6082AC-25 2-way Corner 90° V

Setup:	Easy installation
--------	-------------------

Corner angle:	90°
---------------	-----

Trusspipe:	50 mm x 2 mm
------------	--------------

Alloy:	EN-AW 6082 T6 (AlSi1Mg)
Color:	Alu colored
Strut diameter x thickness:	16 x 2mm
Dimensions:	Length: 50 cm Width: 50 cm Height: 29 cm
Weight:	4.10 kg

ALUTRUSS TRILOCK Base Plate QTG-male

Trusspipe:	50 mm
Color:	Alu colored
Weight:	0.94 kg

Scope of delivery:

8 x ALUTRUSS TRILOCK 6082-2500 3-way Cross Beam

1 x connection set

1 x ALUTRUSS TRILOCK 6082AC-41 4-way Cross

3 x connection set

4 x ALUTRUSS TRILOCK 6082AC-25 2-way Corner 90° V

1 x connection set