


## ALUTRUSS Truss set QUADLOCK 6082 U-Figure 7x4x3.5m (WxDxH)

Art. No.: 20000379

GTIN: 4026397340235

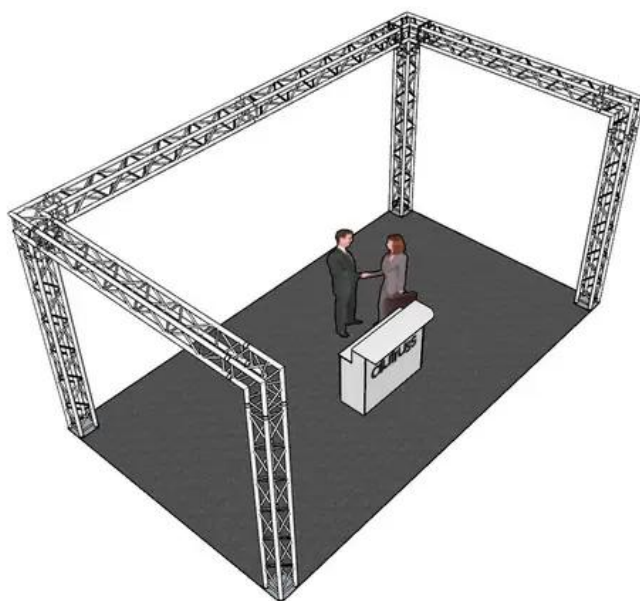

**List price: 6032.11 €**

incl. 19% VAT.

### Features:

### Logistic

EAN / GTIN: 4026397340235

#### ALUTRUSS QUADLOCK 6082-3000 4-way Cross Beam

4-point truss system

- Strong EN-AW 6082 alloy for high loads
- High-quality aluminum-tubes with 50 mm in diameter
- Low weight
- Distance center - center: 240 mm
- Easy installation
- Trusspipe: 50 mm
- TÜV Süd certified
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school
- For further information about this product, please refer to the Data Sheet under "Downloads"

#### ALUTRUSS QUADLOCK 6082C-21 2-way Corner 90°

4-point truss system

- Strong EN-AW 6082 alloy for high loads
- High-quality aluminum-tubes with 50 mm in diameter
- Low weight
- Distance center - center: 240 mm
- Easy installation
- Trusspipe: 50 mm

- Any RAL color available on request
- Made in Europe
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school

#### ALUTRUSS QUADLOCK 6082L-30 3-way Corner 90°

4-point truss system

- Strong EN-AW 6082 alloy for high loads
- High-quality aluminum-tubes with 50 mm in diameter
- Low weight
- Distance center - center: 240 mm
- Easy installation
- Trusspipe: 50 mm
- Made in Europe
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school

#### ALUTRUSS QUICK-LOCK Spare Pivot with Pin

QUICK-LOCK set

- Accessories for the robust truss system with QUICK-LOCK
- For use with TRI/QUAD system
- Trusspipe: 50 mm
- Made in Europe

#### ALUTRUSS QUADLOCK End Plate QQGP-Male M-10

Baseplate for mobile use (connectors 6082 included)

- Easy installation
- The article is delivered pre-assembled
- Trusspipe: 50 mm
- Made in Europe
- Application possibility: Standing  
**half cone**
- M10 thread

#### Technical specifications:

|         |           |
|---------|-----------|
| Weight: | 147.44 kg |
|---------|-----------|

#### ALUTRUSS QUADLOCK 6082-3000 4-way Cross Beam

|                             |                                                 |
|-----------------------------|-------------------------------------------------|
| Setup:                      | Easy installation                               |
| Trusspipe:                  | 50 mm x 2 mm                                    |
| Welding technique:          | TIG-welding                                     |
| Welding material:           | AlMg 5                                          |
| Alloy:                      | AlMgSi1 T6                                      |
| Color:                      | Alu colored                                     |
| Strut diameter x thickness: | 16 x 2mm                                        |
| Dimensions:                 | Length: 300 cm<br>Width: 29 cm<br>Height: 29 cm |
| Weight:                     | 14.2 kg                                         |

**ALUTRUSS QUADLOCK 6082C-21 2-way Corner 90°**

|                             |                                                 |
|-----------------------------|-------------------------------------------------|
| Setup:                      | Easy installation                               |
| Corner angle:               | 90°                                             |
| Trusspipe:                  | 50 mm x 2 mm                                    |
| Welding technique:          | TIG-welding                                     |
| Welding material:           | AlMg 5                                          |
| Color:                      | Alu colored; any RAL color available on request |
| Strut diameter x thickness: | 16 x 2mm                                        |
| Dimensions:                 | Length: 50 cm<br>Width: 50 cm<br>Height: 29 cm  |
| Weight:                     | 5.50 kg                                         |

**ALUTRUSS QUADLOCK 6082L-30 3-way Corner 90°**

|                             |                                                |
|-----------------------------|------------------------------------------------|
| Setup:                      | Easy installation                              |
| Corner angle:               | 90°                                            |
| Trusspipe:                  | 50 mm x 2 mm                                   |
| Color:                      | Alu colored                                    |
| Strut diameter x thickness: | 16 x 2mm                                       |
| Dimensions:                 | Length: 50 cm<br>Width: 50 cm<br>Height: 50 cm |
| Weight:                     | 7.95 kg                                        |

**ALUTRUSS QUICK-LOCK Spare Pivot with Pin**

|            |             |
|------------|-------------|
| Trusspipe: | 50 mm       |
| Color:     | Alu colored |
| Weight:    | 0.09 kg     |

**ALUTRUSS QUADLOCK End Plate QQGP-Male M-10**

|             |                                                   |
|-------------|---------------------------------------------------|
| Setup:      | Easy installation                                 |
| Trusspipe:  | 50 mm                                             |
| Material:   | Aluminum                                          |
| Color:      | Alu colored                                       |
| Dimensions: | Length: 30.7 cm<br>Width: 30.7 cm<br>Height: 5 cm |
| Weight:     | 1.55 kg                                           |
| Thread:     | M10 thread                                        |

## Scope of delivery:

---

### **8 x ALUTRUSS QUADLOCK 6082-3000 4-way Cross Beam**

1 x connection set

### **2 x ALUTRUSS QUADLOCK 6082C-21 2-way Corner 90°**

1 x connection set

### **2 x ALUTRUSS QUADLOCK 6082L-30 3-way Corner 90°**

2 x connection set

### **8 x ALUTRUSS QUICK-LOCK Spare Pivot with Pin**

2 x splint

2 x bolt

### **4 x ALUTRUSS QUADLOCK End Plate QQGP-Male M-10**

1 x plate

4 x half cone