


ALUTRUSS Truss set QUADLOCK 6082 L-Figure 7x4x3.5m (WxDxH)

Art. No.: 20000380

GTIN: 4026397340242

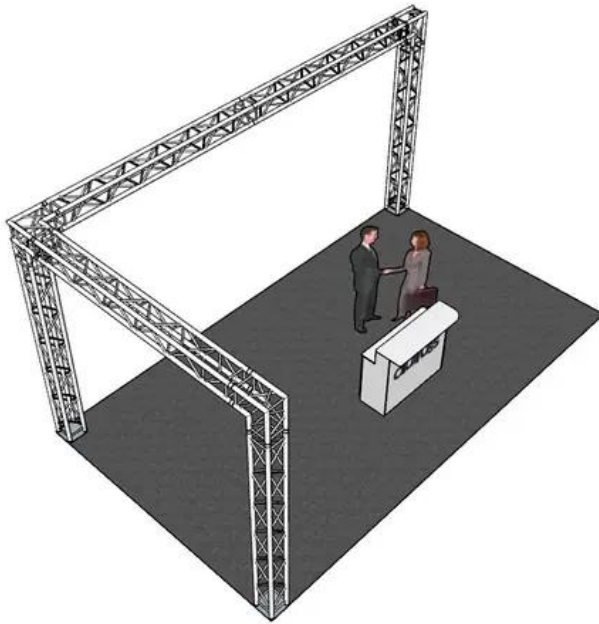

Features:

Logistic

EAN / GTIN: 4026397340242

ALUTRUSS QUADLOCK 6082-3000 4-way Cross Beam

4-point truss system

- Strong EN-AW 6082 alloy for high loads
- High-quality aluminum-tubes with 50 mm in diameter
- Low weight
- Distance center - center: 240 mm
- Easy installation
- Trusspipe: 50 mm
- TÜV Süd certified
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school
- For further information about this product, please refer to the Data Sheet under "Downloads"

ALUTRUSS QUADLOCK 6082C-21 2-way Corner 90°

4-point truss system

- Strong EN-AW 6082 alloy for high loads
- High-quality aluminum-tubes with 50 mm in diameter
- Low weight
- Distance center - center: 240 mm
- Easy installation
- Trusspipe: 50 mm

- Any RAL color available on request
- Made in Europe
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school

ALUTRUSS QUADLOCK 6082L-30 3-way Corner 90°

4-point truss system

- Strong EN-AW 6082 alloy for high loads
- High-quality aluminum-tubes with 50 mm in diameter
- Low weight
- Distance center - center: 240 mm
- Easy installation
- Trusspipe: 50 mm
- Made in Europe
- For application areas such as: Theater; Trade fair and shop fitting; clubs/dancing school

ALUTRUSS QUICK-LOCK Spare Pivot with Pin

QUICK-LOCK set

- Accessories for the robust truss system with QUICK-LOCK
- For use with TRI/QUAD system
- Trusspipe: 50 mm
- Made in Europe

ALUTRUSS QUADLOCK End Plate QQGP-Male M-10

Baseplate for mobile use (connectors 6082 included)

- Easy installation
- The article is delivered pre-assembled
- Trusspipe: 50 mm
- Made in Europe
- Application possibility: Standing
half cone
- M10 thread

Technical specifications:

Weight:	109.36 kg
---------	-----------

ALUTRUSS QUADLOCK 6082-3000 4-way Cross Beam

Setup:	Easy installation
--------	-------------------

Trusspipe:	50 mm x 2 mm
------------	--------------

Welding technique:	TIG-welding
--------------------	-------------

Welding material:	AlMg 5
-------------------	--------

Alloy:	AlMgSi1 T6
--------	------------

Color:	Alu colored
--------	-------------

Strut diameter x thickness:	16 x 2mm
-----------------------------	----------

Dimensions:	Length: 300 cm
	Width: 29 cm
	Height: 29 cm

Weight:	14.2 kg
---------	---------

ALUTRUSS QUADLOCK 6082C-21 2-way Corner 90°

Setup:	Easy installation
Corner angle:	90°
Trusspipe:	50 mm x 2 mm
Welding technique:	TIG-welding
Welding material:	AlMg 5
Color:	Alu colored; any RAL color available on request
Strut diameter x thickness:	16 x 2mm
Dimensions:	Length: 50 cm Width: 50 cm Height: 29 cm
Weight:	5.50 kg

ALUTRUSS QUADLOCK 6082L-30 3-way Corner 90°

Setup:	Easy installation
Corner angle:	90°
Trusspipe:	50 mm x 2 mm
Color:	Alu colored
Strut diameter x thickness:	16 x 2mm
Dimensions:	Length: 50 cm Width: 50 cm Height: 50 cm
Weight:	7.95 kg

ALUTRUSS QUICK-LOCK Spare Pivot with Pin

Trusspipe:	50 mm
Color:	Alu colored
Weight:	0.09 kg

ALUTRUSS QUADLOCK End Plate QQGP-Male M-10

Setup:	Easy installation
Trusspipe:	50 mm
Material:	Aluminum
Color:	Alu colored
Dimensions:	Length: 30.7 cm Width: 30.7 cm Height: 5 cm
Weight:	1.55 kg
Thread:	M10 thread

Scope of delivery:

6 x ALUTRUSS QUADLOCK 6082-3000 4-way Cross Beam

1 x connection set

2 x ALUTRUSS QUADLOCK 6082C-21 2-way Corner 90°

1 x connection set

1 x ALUTRUSS QUADLOCK 6082L-30 3-way Corner 90°

2 x connection set

6 x ALUTRUSS QUICK-LOCK Spare Pivot with Pin

2 x splint

2 x bolt

3 x ALUTRUSS QUADLOCK End Plate QQGP-Male M-10

1 x plate

4 x half cone