


EUROLITE Set AKKU 2x Flat light 3 bk + Bar-6 + Stands

DJ stand with 3 spotlights and speaker stands including white tripod covers

Art. No.: 20000520

GTIN: 4026397649000

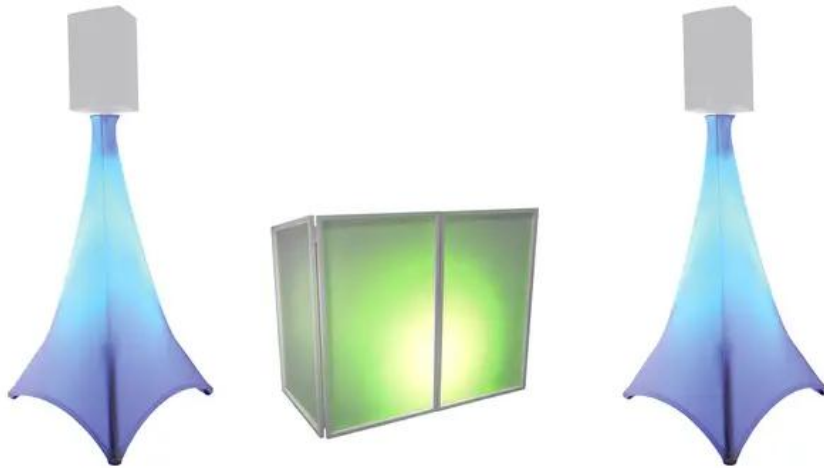

Features:

- Integrated QuickDMX transceiver for wireless DMX control
 - Elegant housing for indoor use
 - Cordless, flexible and versatile
 - Battery operation up to 16h depending on program used
 - Integrated automatic charging of the battery and status indicator
 - 3 LEDs 8 W SMD 9080 4in1 RGBW (homogenous color mix)
 - Dimmer electronic; color change adjustable; color fade adjustable; Dimmer speed (step response) adjustable
 - Strobe effect
 - Direct color selection for 30 preset colors
 - Can be operated in 3; 4; 6; 8; 10 CH mode
 - The device is cooled by passive convection cooling
 - Control via stand-alone; QuickDMX; IR remote control; sound to light via microphone
 - Flicker-free
 - With a beam angle of 12°
 - With mounting bracket
 - OLED display
 - Various versions available
 - With a KENSINGTON LOCK theft protection
 - For application areas such as: Decoration; wedding/gala/events; mobile djs / entertainer; party room; restaurants, bars and hotels
 - Application possibility: Standing
 - Silent operation
 - <p>EUROLITE AKKU Bar-6 Glow QCL Flex QuickDMX
- Tiltable battery-powered LED bar and mood light with 4in1 LEDs and QuickDMX**
- 100° tiltable bar with 6 high-power 8 W RGBW LEDs (4in1) and removable frost filter

Logistic

EAN / GTIN: 4026397649000

Weight: 39,00 kg

Length: 1.30 m

Width: 0.75 m

Height: 0.45 m

Bulky product

- Mood light with milky front screen provides a pleasantly soft light with 30 SMD RGBW LEDs (4in1)
- Integrated QuickDMX transceiver for wireless DMX control
- Cordless, flexible and versatile
- Battery operation up to 13h depending on program used
- Integrated automatic charging of the battery and status indicator
- 30 LEDs 0.25 W SMD 5050 4in1 RGBW (homogenous color mix)
- 6 LEDs 8 W SMD 9080 4in1 RGBW (homogenous color mix)
- Color blend stepless; color change adjustable; color fade adjustable; Dimmer electronic; Dimmer speed (step response) adjustable
- Atmospheric effect
- Integrated show programs
- Direct color selection for 30 preset colors
- Can be operated in 3; 7; 8; 9; 11 CH mode
- The device is cooled by passive convection cooling
- Control via stand-alone; DMX; QuickDMX; IR remote control; sound to light via microphone; master/slave function
- Flicker-free
- With a beam angle of 15°
- Multicolor LCD display
- With a KENSINGTON LOCK theft protection
- For application areas such as: Clubs/dancing school; decoration; wedding/gala/events; mobile djs / entertainer; party room; restaurants, bars and hotels; advertisement/Shop window
- Silent operation
- Application possibility: Standing; suspended; on stand
- knurled screw**
- M6 thread
- <p>OMNITRONIC Speaker Stand MOVE MK2 set
- 2 speaker stands, extendible up to 183 cm, maximum load 30 kg + carrying bag**
- Height adjustable, with locking pin
- Tube diameter: Ø 35 mm
- Adjustable height
- <p>EUROPALMS Tripod Cover white two sided
- Cover for lighting stands**
- Best suited for reproducing light projections
- Extremely stretchable cloth
- Easy installation
- <p>OMNITRONIC Mobile DJ Stand w. Cover
- Portable DJ table with screen for mobile applications**
- Collapsible panels for easy storage and transport
- Ideal to conceal DJ equipment and cable clutter
- Translucent stretch fabric - can be backlit with any lighting effect
- 2 shelves with black felt cover for DJ equipment
- Fast assembly without any tools
- Solid, steel tube construction with hinges
- Removable cloth for convenient cleaning
- Washable (needs to be treated with flame retardant spray afterwards)
- B1 low flammability
- For application areas such as: Mobile djs / entertainer
- For further information about this product, please refer to the Data Sheet under "Downloads"

Technical specifications:

Weight:	30.78 kg
---------	----------

EUROLITE AKKU Flat Light 3 bk

Power supply:	100-240 V AC, 50/60 Hz
	12.6V DC 2500 mA

Protection class:	Protection class III
Power connection:	Battery/battery pack Mains input via coaxial power connector (M) mounting version power supply cord with Euro plug (provided)
Battery pack type:	2 x lithium ion 11.1 V, 2600 mAh, 28.86 Wh
Battery pack:	Battery operation up to 16h depending on program used Recharging time 4h
Lamp type:	LED lamp
LED type:	3 x 8 W SMD 9080 4in1 RGBW (homogenous color mix)
DMX channels:	3; 4; 6; 8; 10
Cooling:	Passive convection cooling
Control:	Stand-alone; QuickDMX; IR remote control; sound to light via microphone
Fixtures available for:	Light´J; EASY SHOW 1; LED EASY OPERATOR 4x4; LED EASY OPERATOR 4x6; LED EASY OPERATOR DELUXE; Light Captain; EASY SHOW 2; EASY SHOW 3; Colorchief
Projection:	Flicker-free
Carrier frequency:	2.4 GHz
Beam angle:	12°
Beam angle (1/2 peak):	12°
Beam angle (1/10 peak):	30°
Housing color:	Black
Attachment system:	Mounting bracket
Display type:	OLED display
Theft protection:	KENSINGTON LOCK
Dimensions:	Width: 16.8 cm Depth: 13.8 cm Height: 6.2 cm
Weight:	1.62 kg
Noise classification:	Class 0 (no noise at all)
Battery:	1 x button cell 3.0 V CR2032 lithium manganese built-in

EUROLITE AKKU Bar-6 Glow QCL Flex QuickDMX

Power supply:	100-240 V AC, 50/60 Hz
Protection class:	Protection class I
Power connection:	Battery/battery pack Mains input via P-Con (blue), mounting version power supply cord with safety plug (provided)
Battery pack type:	1 x lithium ion 11.1 V, 10400 mAh, 115.44 Wh
Battery pack:	Battery operation up to 13h depending on program used Recharging time 4h
Lamp type:	LED lamp

LED type:	30 x 0.25 W SMD 5050 4in1 RGBW (homogenous color mix) 6 x 8 W SMD 9080 4in1 RGBW (homogenous color mix)
DMX channels:	3; 7; 8; 9; 11
DMX input:	3-pin XLR (M) mounting version
DMX output:	3-pin XLR (F) mounting version
Cooling:	Passive convection cooling
Control:	Stand-alone; DMX; QuickDMX; IR remote control; sound to light via microphone; master/slave function
Fixtures available for:	LED PC-Control 512; Light Captain; EASY SHOW 1; EASY SHOW 2; EASY SHOW 3; Colorchief
Projection:	Flicker-free
Carrier frequency:	2.4 GHz
Beam angle:	15°
Beam angle (1/2 peak):	15°
Beam angle (1/10 peak):	30°
Housing color:	Black
Display type:	Multicolor LCD display
Material:	Plastic; metal
Theft protection:	KENSINGTON LOCK
Dimensions:	Length: 41.1 cm Depth: 9.5 cm Height: 10.5 cm
Weight:	2.80 kg
Noise classification:	Class 0 (no noise at all)
Cable construction:	3 x 1.0 mm² H05VV-F
Diameter mounting holes:	2 x Ø4mm
Material:	Plastic, 2 mm
Dimensions:	Length: 33.5 cm Width: 3.9 cm
Battery:	1 x button cell 3.0 V CR2032 lithium manganese built-in
Diameter mounting holes:	1 x Ø11mm; 2 x Ø6mm
Material:	Metal, 2 mm
Dimensions:	Length: 11.7 cm Width: 2.5 cm Height: 2.7 cm
Weight:	0.048 kg
Material:	Metal
Thread:	M6 thread x 11 mm
Diameter mounting holes:	Ø10mm
Material:	Metal, 0.5 mm
Dimensions:	Diameter: Ø 1.2 cm

OMNITRONIC Speaker Stand MOVE MK2 set

Maximum carrying capacity:	30 kg
Tube diameter sector:	35
Height:	Maximum: 183 cm Minimum: 100 cm
Attachment system:	Ø 35mm
Type (general stands):	Speaker stand/manual
Material:	Steel; steel
Color:	Black
Weight:	5.10 kg

EUROPALMS Tripod Cover white two sided

Setup:	Easy installation
Type (general stands):	Accessory
Color:	White
Weight:	0.22 kg

OMNITRONIC Mobile DJ Stand w. Cover

Maximum carrying capacity:	50 kg
Transport dimensions:	125 cm x 75 cm x 15 cm
Table console:	140 cm x 70 cm x 15 cm
Dimensions:	Width: 147 cm Depth: 74 cm Height: 120 cm
Weight:	19.20 kg
Material:	Steel
Color:	Black
Material:	Textile
Color:	White

Scope of delivery:

2 x EUROLITE AKKU Flat Light 3 bk

1 x spotlight
1 x user manual
1 x external mains adapter
1 x remote control
1 x battery
1 x declaration of conformity

1 x EUROLITE AKKU Bar-6 Glow QCL Flex QuickDMX

1 x device
1 x power cord
1 x frost filter
1 x remote control
1 x battery
1 x omega bracket

4 x knurled screw
4 x washer
1 x user manual
1 x declaration of conformity

1 x OMNITRONIC Speaker Stand MOVE MK2 set

1 x bag

2 x EUROPALMS Tripod Cover white two sided

1 x textile cover

1 x OMNITRONIC Mobile DJ Stand w. Cover

1 x stand
1 x textile cover
1 x bag