ALUTRUSS DECOLOCK DQ2-PAT36V 3-way T-Piece 90°

Universal 2-point truss system in lightweight construction

Art. No.: 60301554

GTIN: 4026397391244

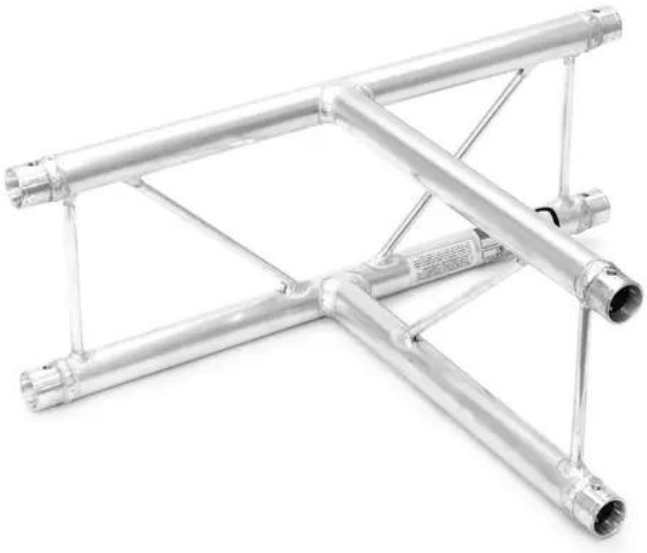



Features:

- Aluminum alloy for a classic high-tech look
- Fast, efficient and reliable assembly via QUICK-LOCK conical connectors
- An extensive selection of lengths, circular and corner elements offers maximum flexibility
- Special designs according to customer specifications on request
- Direction vertical
- Trusspipe: 35 mm
- Any RAL color available on request
- Various versions available
- Made in Europe
- For application areas such as: Shop fitting; trade fair construction; sports centres/gyms; stage; clubs/dancing school; rental; theater; Trade fair and shop fitting; installation

Logistic

EAN / GTIN: 4026397391244
Weight: 2,25 kg
Length: 0.57 m
Width: 0.41 m
Heigth: 0.41 m

Technical specifications:

Corner angle:	90°
Trusspipe:	35 mm x 2 mm
Alloy:	EN-AW 6060 T66 (AlMgSi0.5)
Color:	Alu colored; any RAL color available on request
Strut diameter x thickness:	10 x 2mm
Dimensions:	Length: 58 cm Width: 40 cm Height: 22 cm

Eurolite®, Futurelight®, PSSO®, Roadinger®, Alutruss®, Europalms® and Dimavery® are trademarks of Steinigke Showtechnic GmbH, Andreas-Bauer-Straße 5, DE-97297 Waldbüttelbrunn
All rights reserved. Subject to change without notice. Errors and omissions excepted.Illustration only. Actual item may differ from photo.

Weight:	1.7 kg

Scope of delivery:

2 x connection set

Eurolite®, Futurelight®, PSSO®, Roadinger®, Alutruss®, Europalms® and Dimavery® are trademarks of Steinigke Showtechnic GmbH, Andreas-Bauer-Straße 5, DE-97297 Waldbüttelbrunn
All rights reserved. Subject to change without notice. Errors and omissions excepted.Illustration only. Actual item may differ from photo.