


OMNITRONIC RM-105 Receiver Module WAMS-05

Multifrequency receiving unit for WAMS-05

Art. No.: 13106986

GTIN: 4026397282719

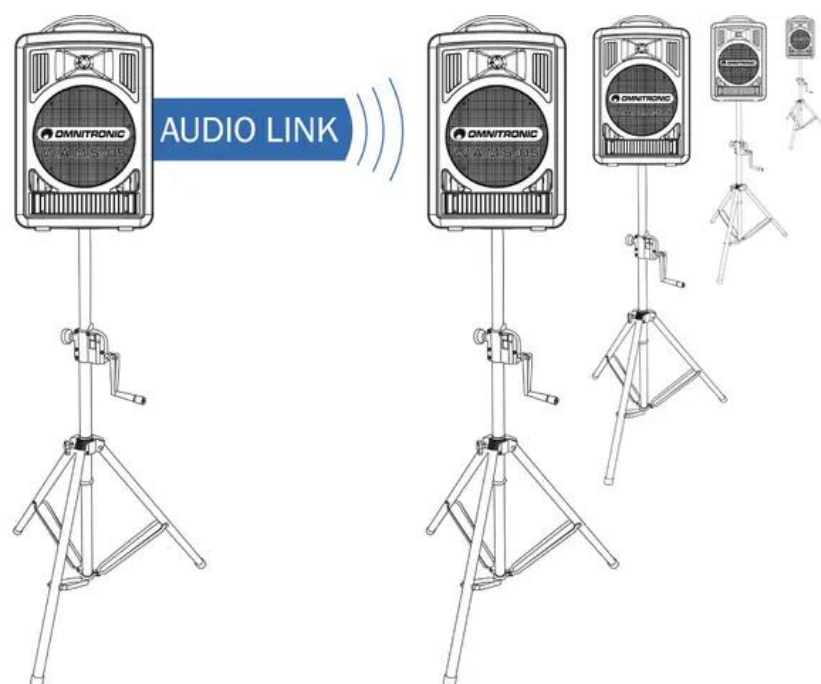

The article is no longer in our assortment.

Description:

The multifrequency receiving unit RM-105 serves as a replacement part or as an extension for the PA system W.A.M.S.-05. The receiving unit operates in the UHF range of 863.100 - 864.900 MHz. The frequency range is divided into 16 channels, which can be selected as desired. The hand-held microphone HM-105, the transmitter module ALT-105 and the pocket transmitter TM-105 can be used for a wireless signal transmission to the receiving unit as they are tuned to the same frequencies.

Logistic

EAN / GTIN: 4026397282719

Weight: 0,17 kg

Length: 0.17 m

Width: 0.13 m

Height: 0.06 m

Features:

- Receiver as UHF PLL system, suitable for W.A.M.S.-05 system
- Applicable for operating with a second receiver channel or as a replacement
- Operation in the low-interference UHF-band (863,1-864,9 MHz) with 16 frequencies selectable
- LCD for channel and frequency
- Volume control
- LEDs for carrier and audio signals
- License-free and approved in the EU
- Operating range up to 30m

Technical specifications:

Frequency range: 70 - 16000 Hz

Range: Up to 30m

Frequency band: UHF

Diversity:	True diversity
Dimensions:	Width: 8.8 cm Depth: 3.7 cm Height: 13.4 cm
Weight:	0.11 kg
System:	PLL multifrequency receiver
Carrier frequency:	UHF 863.100-864.900 MHz
Power supply:	12 V DC, 185 mA
Output voltage:	130 mV max.

Scope of delivery: