


OMNITRONIC CST-608 2-way Ceiling Speaker

2-way flush-mount coaxial speaker, LF: 6.5" HF: 1", 8 ohms, 40 W RMS, 12 cmØ 20.7 cm

Art. No.: 80710224

GTIN: 4026397709124

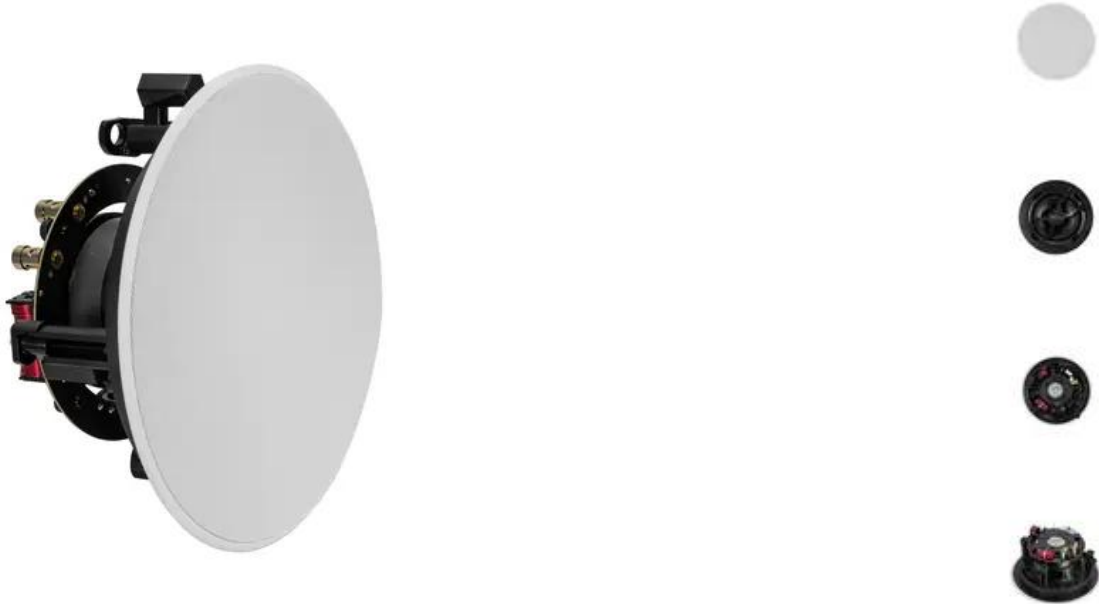

Description:

The models of the CST series are frameless in-ceiling speakers with a particularly discreet appearance for installation in hotels, restaurants, bars, foyers, training and conference rooms or shopping centers. The 2-way coaxial systems have a frequency response of up to 20 kHz, balanced sound and excellent speech intelligibility. The tweeter is protected against overload by a PTC and can be tilted 30 degrees to adapt to local conditions, as well as freely rotated by 360°. Secure mounting clamps allow for fast and easy attachment. The front grille is exchangeable.

Logistic

EAN / GTIN: 4026397709124

Weight: 2,45 kg

Length: 0.28 m

Width: 0.28 m

Height: 0.17 m

Features:

- Excellent sound playback
- With passive 2-way crossover, PTC tweeter protection
- Swivel tweeter
- Level matching switch -3 dB/0 dB/+3 dB
- For speech and background music in indoor PA systems
- White metal grille
- Scratchproof and shockproof
- For application areas such as: Installation; restaurants, bars and hotels; sports centres/gyms

Technical specifications:

Power:	Program: 80W Rated: 40W RMS
Frequency range:	45 - 21000 Hz

Sensitivity:	88 dB (1W/1m)
Max. SPL:	107 dB
Dispersion angle:	105° omnidirectional
Impedance:	8 ohms
Speaker:	1 x woofer 6.5" Tweeter 1"
Type of speaker:	Flush-mount speaker
Material:	ABS Acrylonitrile butadiene styrene
Color:	White, scratchproof and shockproof
Mounting dimensions:	12 cm Ø 20.7 cm
Mounting depth:	120 mm
Dimensions:	Height: 12.5 cm Diameter: Ø 24.8 cm
Weight:	1.93 kg

Scope of delivery:

- 1 x speaker
- 1 x user manual